


CARATTERISTICHE ELETTRICHE DEL CONTATTO ELECTRICAL DATA OF CONTACT

Max. Potenza Commutabile Max. Contact Rating	NO	70	VA
	BI	120	VA
Max. Corrente Commutabile Max. Switching Current	NO	1.5	A
	BI	3.0	A
Max. Corrente Sopportabile Max Carrying Current	NO	2.5	A
	BI	5.0	A
Max. Tensione Commutabile Max. Switching Voltage	NO	200/300	V _{DC} /V _{AC}
	BI	250/250	V _{DC} /V _{AC}


CARATTERISTICHE MECCANICHE MECHANICAL DATA

Materiale del Corpo Material of Body Colore/Color	PA66 30GF Grigio/Gray
Materiale Dadi M12x1 Material of Nut M12x1 Colore/Color	PA66 30GF Nero/Black
Cavo in guaina/Lead Wire Diam./Diam. Colore/Color	H03VV-F Ø 6.0 mm Nero/Black
Conduttori/Conductors	4 x 0.50 mm ²
Temperatura di esercizio Operating temperature	-20 / +100 °C

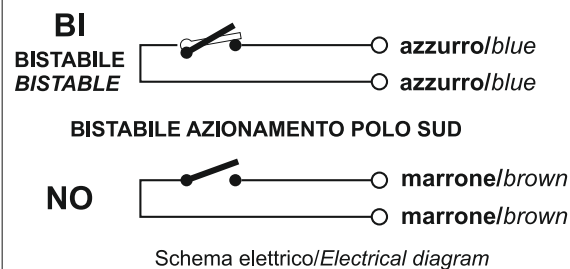

A RICHIESTA
ON REQUEST
Dado M12x1
Nut M12x1
cod.5935061

Ch.19
Hex.19

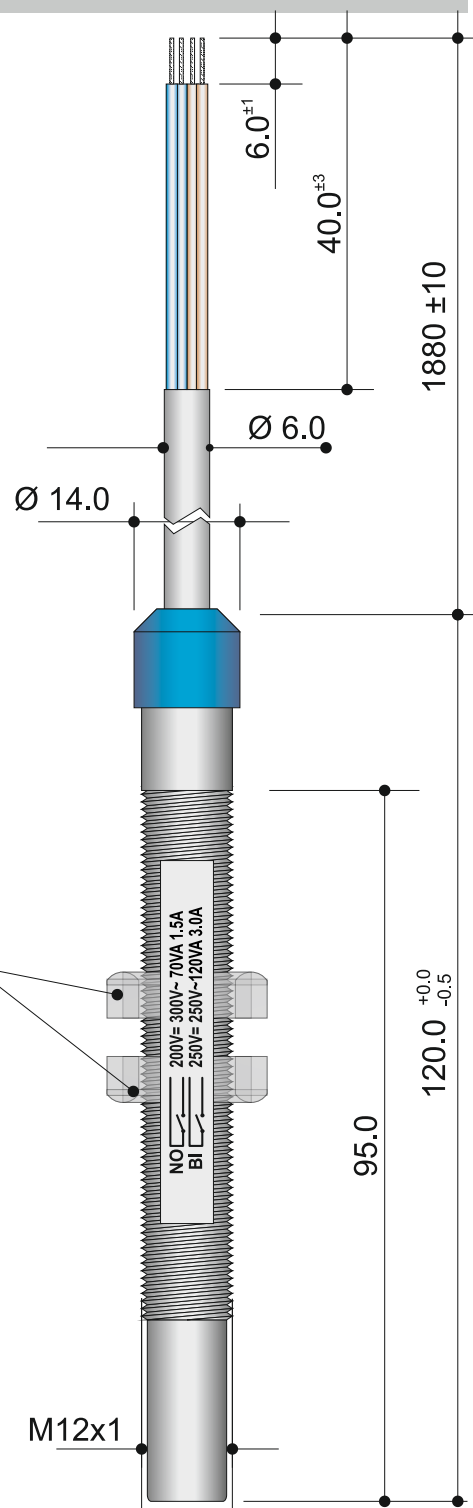

Prodotto protetto da brevetto di invenzione