
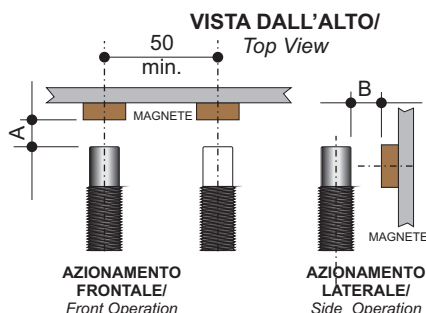
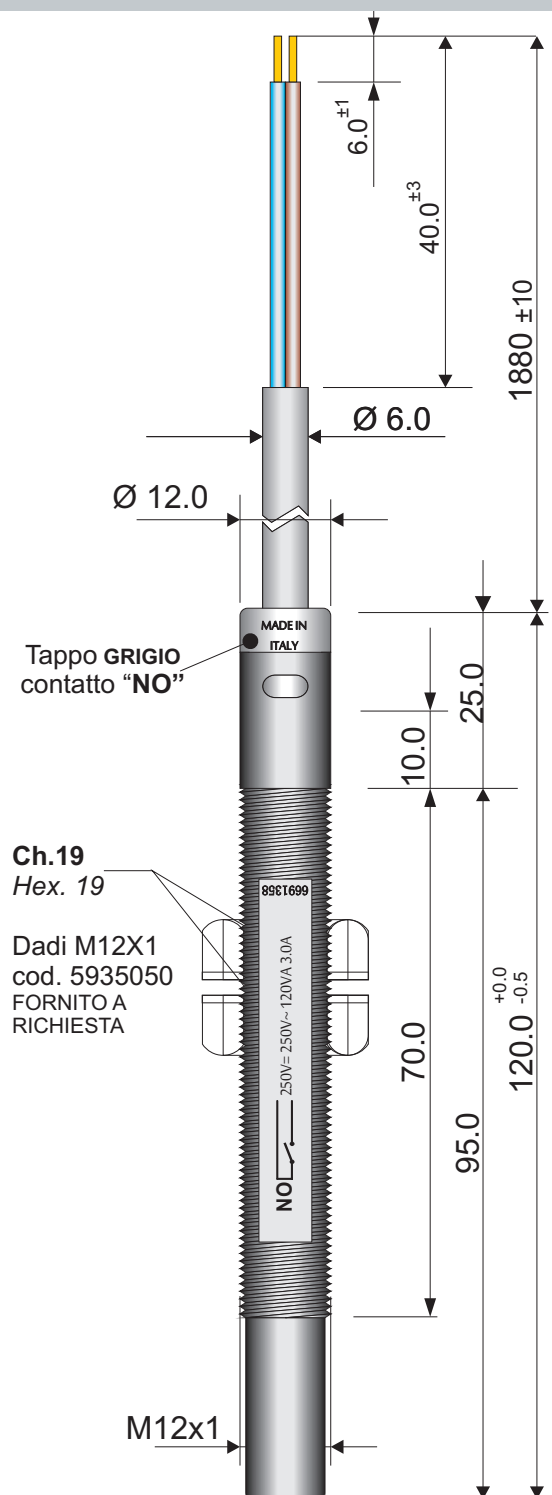


### CARATTERISTICHE ELETTRICHE DEL CONTATTO ELECTRICAL DATA OF CONTACT

Max. Potenza Commutabile Max. Contact Rating	120	VA
Max. Corrente Commutabile Max. Switching Current	3.0	A
Max. Corrente Sopportabile Max Carrying Current	5.0	A
Max. Tensione Commutabile Max. Switching Voltage	250	V <sub>DC</sub> /V <sub>AC</sub>

### CARATTERISTICHE MECCANICHE MECHANICAL DATA

Materiale del Corpo Material of Body Colore/Color	PA66 30FG Nero/Black
Materiale Dadi M12x1 Material of Nut M12x1 Colore/Color	PA66 30FG Nero/Black
Cavo in guaina/Lead Wire Diam./Diam. Colore/Color	CEI 20-22 Ed.III CEI 20-37 Ø 6.0 mm Nero/Black
Conduttori/Conductors	2 x 0.75 mm <sup>2</sup>
Temperatura di esercizio Operating temperature	-20 / +90 °C



Distanze massime di intervento Maximum operating distances	
	ON/OFF
A	20.0
B	25.0

Prodotto protetto da brevetto di invenzione